


FibRSol-1x4 Steel Tube Type 0.9mm PLC Splitter

Model: FS-PLC-ST-1X4-WC (White inlet and white outlet)

Highlights:

- ✓ 1x4
- ✓ Steel Tube Type
- ✓ PLC Splitter
- ✓ 0.9mm

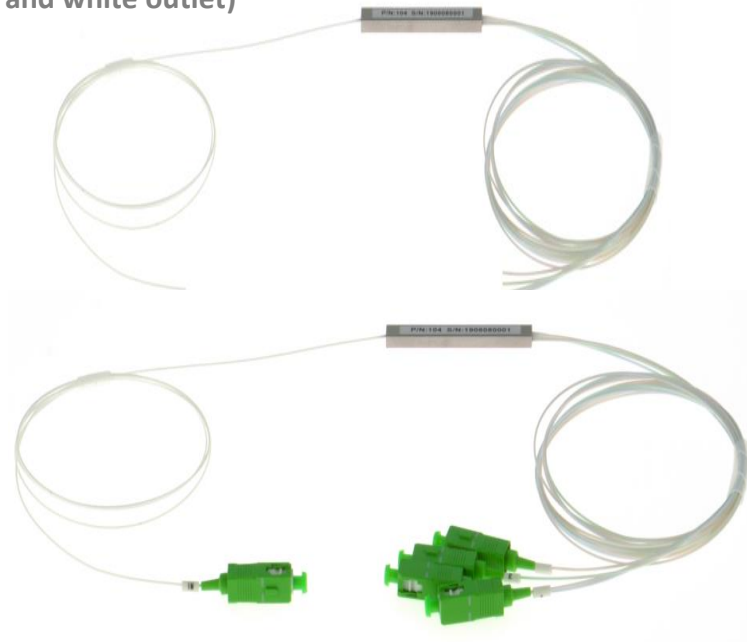

Application:

- ✓ Telecommunication sector
- ✓ PON System
- ✓ FTTH
- ✓ CATV
- ✓ Video Transmission

Features:

- ✓ Broadband Operation Wavelength
- ✓ Low Insertion loss
- ✓ Low PDL
- ✓ Compact Design
- ✓ Good channel-to-channel uniformity
- ✓ High Reliability and Stability

Specifications:

Item	Parameter
Operating Wavelength	1260 ~ 1650nm
Type	1:4
Max. Insertion Loss	7.2dB
Max. Uniformity	0.8dB
Min. Return Loss	55dB
Max. PDL	0.3dB
Fiber Type	ITU-T G657A1
Cable Diameter	0.9mm
Cable Length	1Mtr or customized
Steel Tube Dimension	60*7*4mm
Max. Temperature Stability	0.5dB (Typical 0.3dB)
Operating Temperature	-40 ~ +85°C
Storage Temperature	-40 ~ +85°C

All measurement are made at room temperature, and connectors not include.

White inlet and colored outlet:



Ordering Information:

Model	Description
FS-PLC-ST-1X4-WC	Steel Tube Type, PLC splitter ,1X4, SM, 0.5m length, Without Connector, 0.9 mm cable